

HEP5 - ELECTRIC DRIVEN PUMPS - HEAVY DUTY HIGH FLOW




Low pressure flow rate 17 ltr/min up to 70 Bar

High pressure flow rate 2 ltr/min up to 700 Bar

Two stage hydraulic pump unit

- >> Externally adjustable pressure relief valve
- >> Manual valve with load holding feature fitted as standard (excl. 2-way valves)
- >> Solenoid valve options available

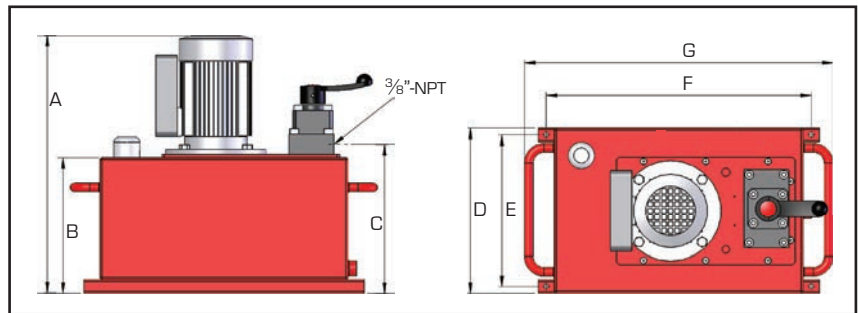

| Model number | Valve type | Oil cap. litres | Motor kW | Motor voltage | Weight kg |
|--------------|------------|-----------------|----------|---------------|-----------|
| HEP517142 | P-T Plate | 40 | 2.2 | 220 / 240 | 88.5 |
| HEP517144 | P-T Plate | 40 | 2.2 | 380 / 440 | 88.5 |
| HEP517162 | P-T Plate | 60 | 2.2 | 220 / 240 | 120.0 |
| HEP517164 | P-T Plate | 60 | 2.2 | 380 / 440 | 120.0 |
| HEP517242 | 2-way | 40 | 2.2 | 220 / 240 | 89.0 |
| HEP517244 | 2-way | 40 | 2.2 | 380 / 440 | 89.0 |
| HEP517262 | 2-way | 60 | 2.2 | 220 / 240 | 120.0 |
| HEP517264 | 2-way | 60 | 2.2 | 380 / 440 | 120.0 |
| HEP517342 | 3-way | 40 | 2.2 | 220 / 240 | 89.0 |
| HEP517344 | 3-way | 40 | 2.2 | 380 / 440 | 89.0 |
| HEP517362 | 3-way | 60 | 2.2 | 220 / 240 | 120.0 |
| HEP517364 | 3-way | 60 | 2.2 | 380 / 440 | 120.0 |
| HEP517442 | 4-way | 40 | 2.2 | 220 / 240 | 89.0 |
| HEP517444 | 4-way | 40 | 2.2 | 380 / 440 | 89.0 |
| HEP517462 | 4-way | 60 | 2.2 | 220 / 240 | 120.0 |
| HEP517464 | 4-way | 60 | 2.2 | 380 / 440 | 120.0 |

| Dimensions in mm | | | | | | | |
|------------------|-----|-----|-----|-----|-----|-----|--|
| A | B | C | D | E | F | G | |
| 636 | 336 | 368 | 306 | 281 | 490 | 560 | |
| 636 | 336 | 368 | 306 | 281 | 490 | 560 | |
| 657 | 357 | 389 | 406 | 381 | 513 | 583 | |
| 657 | 357 | 389 | 406 | 381 | 513 | 583 | |
| 636 | 336 | 368 | 306 | 281 | 490 | 560 | |
| 636 | 336 | 368 | 306 | 281 | 490 | 560 | |
| 657 | 357 | 389 | 406 | 381 | 513 | 583 | |
| 657 | 357 | 389 | 406 | 381 | 513 | 583 | |
| 636 | 336 | 368 | 306 | 281 | 490 | 560 | |
| 636 | 336 | 368 | 306 | 281 | 490 | 560 | |
| 657 | 357 | 389 | 406 | 381 | 513 | 583 | |
| 657 | 357 | 389 | 406 | 381 | 513 | 583 | |
| 636 | 336 | 368 | 306 | 281 | 490 | 560 | |
| 636 | 336 | 368 | 306 | 281 | 490 | 560 | |
| 657 | 357 | 389 | 406 | 381 | 513 | 583 | |
| 657 | 357 | 389 | 406 | 381 | 513 | 583 | |

Note: For optional extras please see page 50